
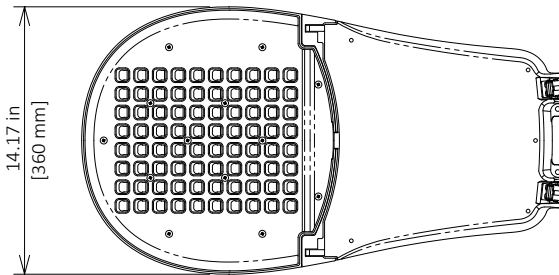


# GreenCobra™ LED Street Light GC1

## Luminaire Data

**Weight** 21 lbs [9.5 kg]  
**EPA** 0.9 ft<sup>2</sup>

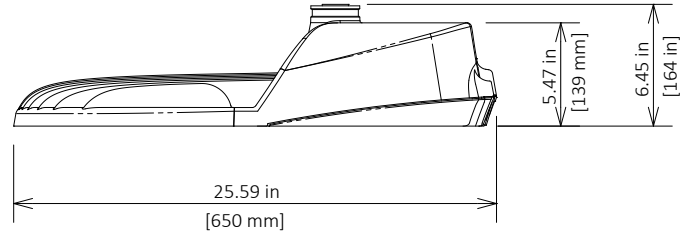

## Ordering Information

Sample Catalog No. GC1 60F MV NW 2 GY 350 BSK RPB FDC

Product	No. & Type of LEDs	Voltage	Color Temperature <sup>1</sup>	Distribution	Finish <sup>2</sup>	Drive Current <sup>3</sup>	Options
GC1	20F	MV 120-277V	NW 4000K	2 Type 2	GY Gray	350 350mA	BSK Bird Spider Kit SPB Square Pole Bracket RPB Round Pole Bracket PTB Pole-Top Bracket HSS <sup>5</sup> House Side Shield FDC <sup>6</sup> Fixed Drive Current LPCR Less Photocontrol Receptacle PCR5 ANSI 5-wire Photocontrol Receptacle PCR7 ANSI 7-wire Photocontrol Receptacle SC PCR Shorting Cap WL Utility Wattage Label
	30F	HV 347-480V		3 Type 3	DB Dark Bronze BK Black	530 530mA 700 700mA 1A <sup>4</sup> 1A	

Notes:

- Nominal 4000K standard, consult factory for other color temperatures.
- Gray, Black and Dark Bronze standard, consult factory for other finishes.
- Factory set drive current, field adjustable standard. Refer to performance data on page 2.
- 1A drive current only available with 40F.
- Flush mounted house side shield factory installed. Shield cuts light off at 1/2 mounting height behind luminaire.
- Non-field adjustable, fixed drive current.

## Luminaire Specifications

### Housing

Die cast aluminum housing with universal four-bolt slip fitter mounts to 1-1/4" to 2" (1-5/8" to 2-3/8" O.D.) diameter mast arm. Meets 3G vibration per ANSI C136. Leveling adjustment from +10° to -5° and integral bubble level standard. Electrical components are accessed without tools and are mounted on removable power door. Power door features quick electrical disconnects to terminal block and LED board.

### Light Emitting Diodes

Hi-flux/Hi-power white LEDs produce a minimum of 95% of initial intensity at 100,000 hours of life. LEDs are tested in accordance with IES LM-80 testing procedures. Mean correlated color temperature of 4000K (standard) and 70 minimum CRI. LEDs are 100% mercury and lead free.

### Optical Systems

Micro-lens systems produce IESNA Type 2 or Type 3 distributions. Luminaire produces 0% total lumens above 90° (BUG Rating, U=0).

### Electrical

Power supply drive current is field adjustable (350mA, 530mA or 700mA for the 700mA power supply or 530mA, 700mA or 1A for the 1A power supply). Power supply features a minimum power factor of .90 and <20% Total Harmonic Distortion (THD). EMC meets or exceeds FCC CFR Part 15. Transient voltage complies with ANSI C62.41 Cat. A. Integral surge protector is tested per ANSI/IEEE C62.45 procedures based on ANSI/IEEE C62.41.2 definitions for standard and optional waveforms for Location Category C High. Photocontrol receptacle is standard, ANSI C136.41 5-wire (PCR5) or 7-wire (PCR7) dimming receptacle optional. Standard and optional photocontrol receptacles have tool-less rotatable base. Photocontrol or control module is provided by others. Power Supply is 0-10V dimmable standard with PCR5 or PCR7 option.

### Finish

Housing receives a fade and abrasion resistant, epoxy polyester powder coat.

### Listings/Ratings/Labels

Luminaires are UL listed for use in wet locations in the United States and Canada. Optical systems maintain an IP66 rating. Design Lights Consortium qualified product. Luminaire is qualified to operate at ambient temperatures of -40°C to 40°C. Assembled in the U.S.A

### Photometry

Luminaires are photometrically tested by certified independent testing laboratories in accordance with IES LM-79 testing procedures.

### Warranty

10-year Limited Warranty is standard on luminaire and components.

## Performance Data

All data nominal, consult factory for IES files or LM-79 reports.

No. of LEDs & Type	Drive Current (mA)	System Wattage (W)	Delivered Lumens (Lm) <sup>1</sup>	Efficacy (Lm/W)	Type 2	Type 3
					BUG Rating	BUG Rating
20F	350	25	2700	108	B1 U0 G1	B1 U0 G1
	530	35	3650	104	B1 U0 G1	B1 U0 G1
	700	47	4800	102	B1 U0 G1	B1 U0 G1
30F	350	35	3800	109	B1 U0 G1	B1 U0 G1
	530	53	5400	102	B1 U0 G1	B2 U0 G1
	700	70	7000	100	B2 U0 G2	B2 U0 G2
40F	350	45	5050	112	B1 U0 G1	B2 U0 G1
	530	70	7200	103	B2 U0 G2	B2 U0 G2
	700	92	9300	101	B2 U0 G2	B2 U0 G2
	1000	132	12300	93	B3 U0 G3	B3 U0 G3
60F	350	70	7600	109	B2 U0 G2	B2 U0 G2
	530	101	10400	103	B2 U0 G2	B2 U0 G2
	700	133	13400	101	B3 U0 G3	B3 U0 G3
80F	350	85	9500	112	B2 U0 G2	B2 U0 G2
	530	133	14200	107	B3 U0 G3	B3 U0 G3
	700	180	17700	98	B3 U0 G3	B3 U0 G3

Notes:

1 Nominal lumens. Normal tolerance ± 10% due to factors including distribution type, LED bin variance, and ambient temperatures.